



Model Number: M0824D4UFL-F7F7-A

RF Engineering and Custom Build

8 x 24 L-band Matrix


With local and remote control (via RJ45 Ethernet Port & RS232/422/485 Serial Port)
Designed for ships



Front View of Model M0824D4UFL-F7F7-A

The ETL 4U L-band distributive matrix is a high performance switch matrix (or router) with up to 8 inputs and 24 outputs, integrated power supplies and matrix controller in a 4U high shelf. The matrix design is ideal for marine applications, which have non-symmetric satellite downlinks in terms of number of inputs and outputs. Offering the matrix in a single unit enhances RF performance, reduces cost and is faster to install than traditional solutions.

The matrix incorporates a standard ETL controller which can be remotely controlled via either a PC (using ETL software) or integrated into an M & C system. Dual redundant integrated power supplies provide security against the impact of unforeseen failure.

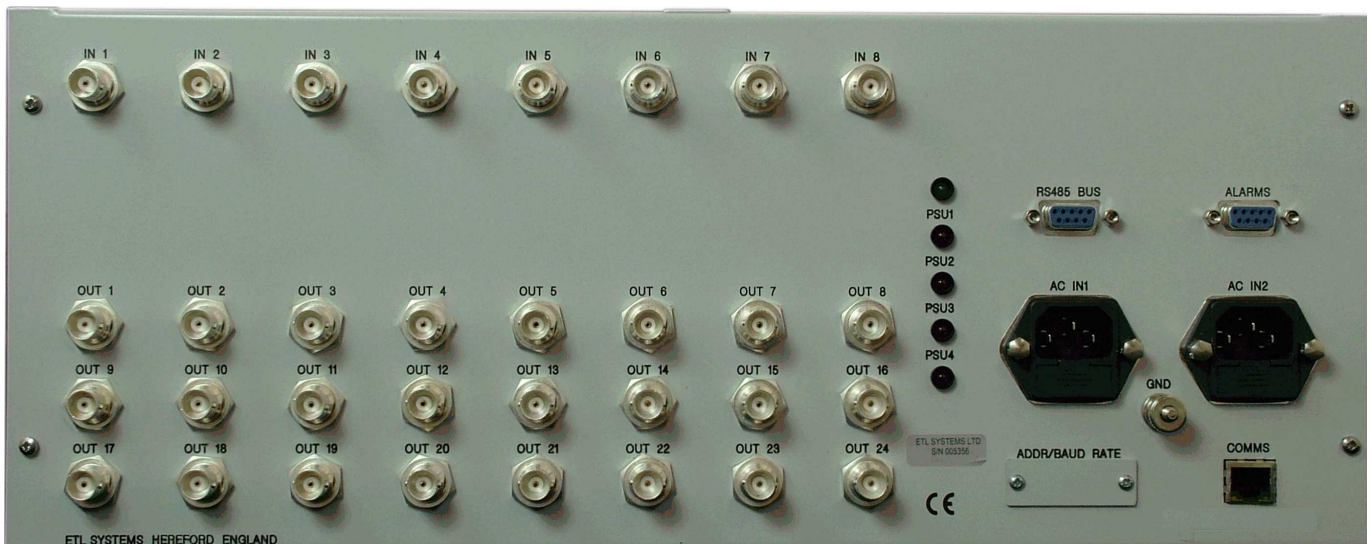

Rear view of similar model

In the event of total power failure, all matrix settings are retained. The unit can be supplied in a partially populated state but the units must be returned to base for later expansion or maintenance. This particular unit has 75 ohm F-type connectors, but other impedances and connector types are available.





Model Number: M0824D4UFL-F7F7-A

RF Engineering
and Custom Build

8 x 24 L-band Matrix with local and remote control (via
RJ45 Ethernet Port & RS232/422/485 Serial Port)

Technical specifications and operating parameters

RF Parameters		
Capacity	8 inputs x 24 outputs	
Frequency Range	850–2150 MHz (L-band)	
Gain	± 1 dB ± 1.5 dB nominal, mean	
Flatness	850-2150MHz	± 2.0 dB typical
	Over any 36MHz	± 0.75 dB typical
Isolation	Adjacent port (I/P-O/P)	40 dB typical
	Non-adjacent port (I/P-O/P)	> 40 dB
	I/P to I/P	> 50 dB
	O/P to O/P	> 60 dB
1 dB Compression	0 dBm typical	
Noise Figure	7.5 dB	
Input Return Loss	10 dB typical	
Output Return Loss	10 dB typical	

System Control	
Display	Front panel display
Local Control	Front panel display & push buttons
Remote Control	RS232/422/485 serial port and RJ45 Ethernet port, including SNMP & Web Browser Interface
Alarms	Dry contact alarm port on rear panel for PSU failure

Power	
AC Power	85-264Vac 50/60Hz
LNB Power	None
PSU	Dual redundant
Hot-swap PSU	No

Environmental	
Operating temperature	0 to 45°C
Location	Indoor use only
Storage temperature	-20°C to +75°C
Humidity	85% non-condensing

Physical	
Input Connector	F-type
Input Impedance	75Ω
Output Connector	F-type
Output Impedance	75Ω
Dimensions	4U high x 450mm deep x 19" wide
Weight	15 kg
Colour	White 00-E-55 semi-gloss (Front panel)

Key Features
Ideal for Marine Applications
Simple protocol for M & C integration
Local and remote control
Alarmed internal PSU's and Integrated Controller

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com

